



The .308 Win. SEMI-AUTO

**NEW! .308 Win. 11 g FMJBT
SEMI-AUTO cartridge**

- New cartridge especially developed for semi-auto rifles
- Powder type and charge tailored for shorter (16") barrel
- Minimized muzzle blast with short barrels
- Excellent accuracy: < 1 MOA at 300 m (328 yrd)
- Operates flawlessly with semi-auto DMR-type rifles

Lapua's latest special purpose cartridge is developed for short barreled semi-auto rifles. This cartridge is designed for optimum ballistic performance in shorter barrels (12"-20"). Lapua tailored the powder type and charge weight to reduce muzzle blast and flash while still delivering outstanding accuracy and velocity. From a standard 16" barrel, muzzle velocity should be 754 m/s and routinely capable of shooting groups under 1 MOA at 300 meters (<87mm / 300m) with quality rifles. This new special purpose cartridge works flawlessly with DMR-type semi-auto rifles.




The .308 Win. SEMI-AUTO

Ballistic performance

Bullet
 Recommended barrel length
 Accuracy optimized to barrel length
 Velocity, 16" barrel length
 Accuracy at 300 meter

B476 FMJBT LockBase
 12" – 20"
 16"
 754 m/s
 under 1 MOA

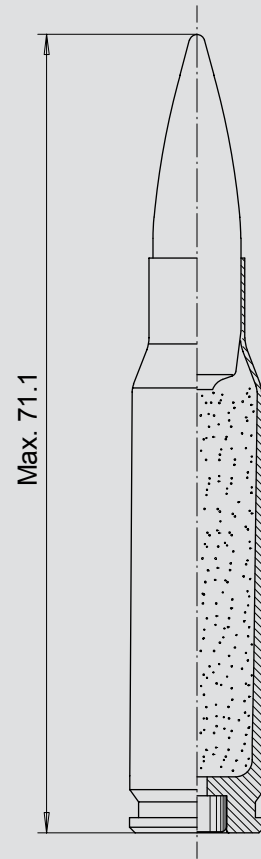

METRIC DATA

Caliber	Product no.	Bullet type Weight (grams/grains) Code	Velocity [m/s] (Note barrel length) Energy [J] Crosswind drift [mm] (Sidewind 4 m/s)							Rifle sighted in at	Trajectory [mm]						Test barrel length [mm]
											Impact point above or below line of sight when scope 40 mm above bore line						
			0 m	100 m	200 m	300 m	600 m	800 m	1000 m		100 m	200 m	300 m	600 m	800 m	1000 m	
.308 Win.	43M7600 SEMI-AUTO	Lock Base 11,0 g / 170 gr B476	754	694	636	579	420	326	100	0	-164	-572	-3835	-8683		400	
			3127	2649	2223	1846	969	586	300	191	217	0	-2691	-7157			
			0	0	49	155	925	1990	600	639	1114	1345	0	-3569			

IMPERIAL DATA

Caliber	Product no.	Bullet type Weight (grains / grams) Code	Velocity [fps] Energy [ft.-lbs.] Crosswind drift [in.] (Sidewind 13 fps)							Rifle sighted in at	Trajectory [inch]						Test barrel length [inch]
											Impact point above or below line of sight when scope 1.6 inch above bore line						
			0 yd.	100 yd.	200 yd.	300 yd.	600 yd.	800 yd.	1000 yd.		100 yd.	200 yd.	300 yd.	600 yd.	800 yd.	1000 yd.	
.308 Win.	43M7600 SEMI-AUTO	Lock Base 11,0 g / 170 gr B476	2474	2294	2118	1948	1464	1164	100 yds	0	-6	-19	-122	-269		16	
			2307	1983	1691	1430	808	511	300 yds	6	7	0	-84	-218			
			0	0	2	5	29	61	600 yds	20	35	42	0	-106			



Nammo Lapua Oy
 PO. Box 5
 FI-62101 Lapua, Finland
 Tel. +358 10 523 3800
 Fax +358 6 431 0244
 info@lapua.com www.lapua.com

Part of **Nammo** Group

Your retailer